

# SMHV Series

Sub-Miniature Regulated HV DC to DC Converter



## Features

- ❖ Sub-Miniature Case Size (0.85" x 0.85" x 0.6") in a Low Profile PCB Mount Configuration
- ❖ 5V Input, Models up to 10kV @ 1W
- ❖ Excellent Output Regulation and Stability
- ❖ Adjustable from 0 to Full Output
- ❖ Extremely Low Ripple and EMI/RFI
- ❖ High Impedance Programming Input
- ❖ Extremely Low Quiescent Current
- ❖ Voltage and Current Monitor Outputs
- ❖ Current Limiting Input
- ❖ Wide Operating Temp Range (-55°C to +70°C)

## Description


The SMHV Series is a family of sub-miniature single-output, fully regulated DC to DC converters supplying up to 10kV @1W in 0.434 cubic inches (0.85" x 0.85" x 0.6"). These ultra-compact converters are ideal for applications requiring small size, high performance, and ease of use. HVM's proprietary, ultra-compact resonant converter design minimizes quiescent current and operating noise while delivering maximum performance and reliability.

The devices operate directly from 5VDC  $\pm$  0.5VDC input. Output voltage is independent of input power voltage and is proportional to the programming voltage (0 to 5V produces 0 to full scale output) and features excellent linearity.


Voltage and current monitor outputs provide the user with operational information for maximum control.

The SMHV Series has additional features such as voltage and current monitor outputs, and current limit control input. The SMHV Series is very stable over a wide operating temperature range.

## Application

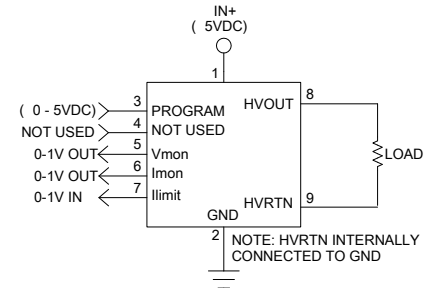

## Mechanical

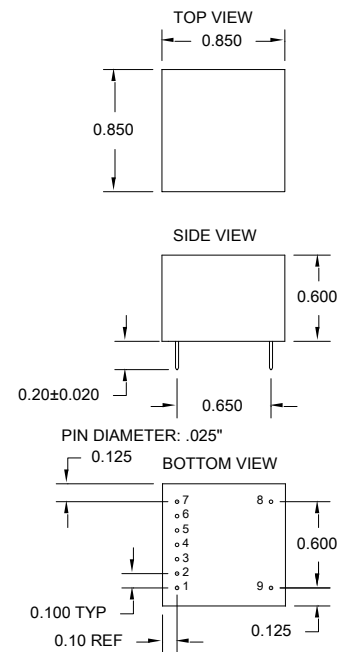

PIN #	FUNCTION
1	Vin
2	GND
3	Program
4	Not Used
5	Vmonitor
6	Imonitor
7	Ilimit
8	HVout
9	HVRTN

Website: [www.hvmtech.com](http://www.hvmtech.com)

Email: [sales@hvmtech.com](mailto:sales@hvmtech.com)

(877) 626-5552 Ext. 211

# SMHV Series

Ultra-Miniature HV Power Supply

## Mechanical Characteristics

**Size:** 0.85"L x 0.85"W x 0.6"H

**Weight:** 15 grams typical

**Packaging:** Encapsulated in high performance epoxy

**Case Material:** Thermoset plastic (Diallyl Phthalate) – Optional Metal Shielded Case Available

## Electrical Characteristics (at +23°C)

**Input Power Voltage (V+):** 5V ± 10%

**Programming Voltage:** 0 to 5VDC results in 0 to rated output

**Programming Input Impedance:** 10kΩ

**Input Current Limit:** 0 to 1VDC input results in a current load limit to 0 to 100% of rated current (see Table 1)

**Note:** To disable current limit, connect Ilimit pin to 5V.

**Output Tolerance at No Load:** ± 5%

**Output Voltage Monitor:** 0 to 1VDC output, corresponding to 0 to 100% of rated output (see Table 1)

**Output Current Monitor:** 0 to 1VDC output, corresponding to 0 to 100% of rated current (see Table 1)

**Input-Output Isolation:** Not isolated, HVRTN internally connected to GND

**Load Regulation:** 0.2% (over entire load range)

**Line Regulation:** 0.01%

**Output Ripple:** <.01%

**Oscillator Frequency:** 45 kHz – 80 kHz

**Efficiency:** 60% typical at full load

[Request Quote](#)

## Environmental Characteristics

**Operating Temp Range:** -55°C to +70°C

**Storage Temp Range:** -55°C to +85°C

Model	Input Voltage	Output Voltage	MAX Output Current	Input Current (typical)	
				No Load	Max Load
SMHV0505	5V	0 to +500V	2mA	<35mA	<350mA
SMHV0505N	5V	0 to -500V	2mA	<35mA	<350mA
SMHV0510	5V	0 to +1kV	1mA	<35mA	<350mA
SMHV0510N	5V	0 to -1kV	1mA	<35mA	<350mA
SMHV0520	5V	0 to +2kV	500µA	<35mA	<350mA
SMHV0520N	5V	0 to -2kV	500µA	<35mA	<350mA
SMHV0530	5V	0 to 3kV	333µA	<35mA	<350mA
SMHV0530N	5V	0 to -3kV	333µA	<35mA	<350mA
SMHV0540	5V	0 to +4kV	250µA	<35mA	<350mA
SMHV0540N	5V	0 to -4kV	250µA	<35mA	<350mA
SMHV0550	5V	0 to +5kV	200µA	<35mA	<350mA
SMHV0550N	5V	0 to -5kV	200µA	<35mA	<350mA
SMHV0560	5V	0 to 6kV	167µA	<35mA	<350mA
SMHV0560	5V	0 to -6kV	167µA	<35mA	<350mA
SMHV0580	5V	0 to +8kV	125µA	<35mA	<350mA
SMHV0580N	5V	0 to -8kV	125µA	<35mA	<350mA
SMHV05100	5V	0 to +10kV	100µA	<35mA	<350mA
SMHV05100N	5V	0 to -10kV	100µA	<35mA	<350mA

The information appearing here is believed to be reliable, however, it is not to be construed as a warranty of performance, and no express or implied warranty is made with respect to same. Any information contained herein is subject to change without notice.